

IDP Inc. NOTES and HANDING

- Material shown on these drawings will be fabricated only after formal approval by the architect, receipt of approval hardware schedule, and all necessary hardware templates.

- All frames shall be shipped “knocked-down” unless otherwise specified as pre-hung.

- All frames and doors shall be cleaned, dried, and sanded prior to receiving application of field paint.



- Doors and frames will be reinforced for surface mounted hardware as required. Drilling and tapping for surface mounted hardware shall be applied by others.

- It will be the responsibility of the General Contractor to coordinate hardware locations.



- All frames and doors may be tagged with shop marks for an additional charge. This schedule can be used to cross reference shop marks with architects marks.

DOOR HANDING CHART

SINGLE DOORS

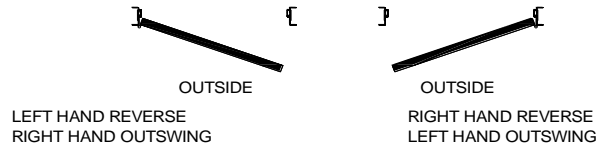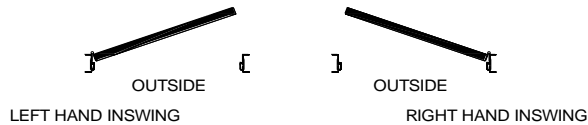

PAIRS OF DOORS

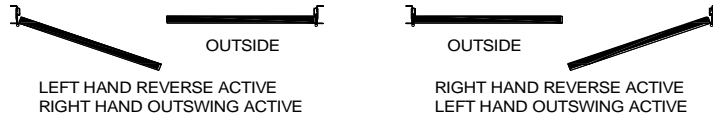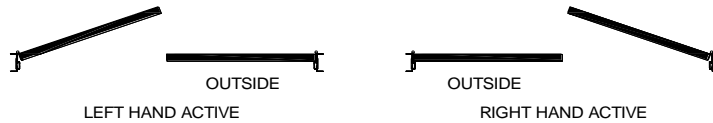

- Field welding, grinding, finishing, and attachment of field splices by others.

- All standard type hardware will be located at this manufacturer’s standard locations as shown on the door and frame elevations. Hardware items such as panic exit devices, deadbolts, etc. will also be located at manufacturer’s standard locations unless specifically advised.

- Installations of all glass and glazing to be performed by others.

- Doors, frames, and finish hardware to be installed by others.

- All frames must be set absolutely plumb, square, and level.

- All non kerfed frames will be supplied with door silencers: three for single swing openings and two per header for double swing openings.



IDP Inc.
 21300 W. 8 Mile Rd.
 Southfield, MI 48075
 1-877-645-2770

Phone: 248-352-0044
Fax: 248-352-4222
www.idpframes.com
info@idpframes.com

PROJECT:	
JOB NO.	
SHEET:	OF: