

IDP Inc. HINGE and STRIKE LOCATIONS for Common Doors

K2A SERIES HINGE & STRIKE LOCATIONS

These frame dimensions allow for 1/8" clearance at top of the door.
For door machining please subtract 1/8" from each dimension.

MASONITE

DOOR SIZE	"A"	"B"	"C"	"D"	"E" STD SILL	"E" H/C SILL	"F"
6'-8"	6-5/8"	37-5/8"	68-5/8"	N/A	80-3/4"	80"	46"
7'-0"	6-5/8"	37-5/8"	68-5/8"	N/A	84-3/4"	84"	46"
8'-0"	6-5/8"	32-5/8"	58-5/8"	84-5/8"	96-3/4"	96"	62"

TAYLOR DOOR (PERMA-DOOR)


DOOR SIZE	"A"	"B"	"C"	"D"	"E" STD SILL	"E" H/C SILL	"F"
6'-8"	7-3/4"	37-11/16"	67-5/8"	N/A	80-7/8"	80-1/8"	45-1/4"
7'-0"	9-3/4"	39-11/16"	69-5/8"	N/A	84-7/8"	84-1/8"	47-1/4"
8'-0"	7-3/4"	32-15/16"	58-1/8"	83-5/16"	96-7/8"	96-1/8"	56-1/16"

PREMDOR

DOOR SIZE	"A"	"B"	"C"	"D"	"E" STD SILL	"E" H/C SILL	"F"
6'-8"	6-9/16"	37-3/4"	68-15/16"	N/A	81"	80-1/4"	43-13/16"
7'-0"	6-9/16"	39-3/4"	72-15/16"	N/A	85"	84-1/4"	47-13/16"
8'-0"	6-9/16"	32-11/16"	58-13/16"	84 15/16"	97"	96-1/4"	59-13/16"

THERMA-TRU

DOOR SIZE	"A"	"B"	"C"	"D"	"E" STD SILL	"E" H/C SILL	"F"
6'-8"	8-1/2"	37-3/4"	67"	N/A	81-5/32"	80-13/32"	44-3/32"
7'-0"	8-1/2"	37-3/4"	67"	N/A	85-5/32"	84-13/32"	48-3/32"
8'-0"	5-11/32"	30-27/32"	56-11/32"	81-27/32"	97-5/32"	96-13/32"	60-3/32"

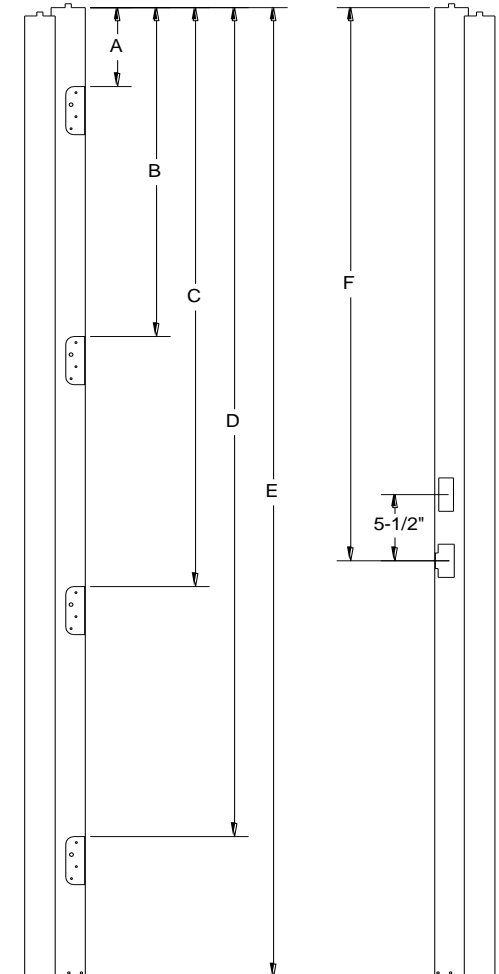

IDP Inc.
21300 W. 8 Mile Rd.
Southfield, MI 48075
1-877-645-2770

Phone: 248-352-0044
Fax: 248-352-4222
www.idpframes.com
info@idpframes.com

PROJECT:

JOB NO.

SHEET:

OF: