

# **IDP Entry-Fit™ Steel Door Frames**

## **Installation Instructions**

### **F & KF Series Frames**




**IDP Inc**  
**21300 W. 8 Mile Rd.**  
**Southfield, MI 48075**  
**1-877-645-2770**  
**www.idpframes.com**  
**email: [info@idpframes.com](mailto:info@idpframes.com)**


# IDP Entry-Fit™ Steel Door Frames

## F & KF-SERIES INSTALLATION PROCEDURE


Open carton and remove all frame components. Inspect for any damage. If any damage is found, notify dealer or sales representative immediately to expedite replacement.




1. Place header over wall




2. Place hinge jamb over wall



3. Place strike jamb over wall



4. Pull header down to jambs and hang door



5 Fasten frame starting at top of hinge jamb

1. Place header over wall, centering header in opening. If necessary fasten temporarily with nails or screws (Fig. 1).

2. Hold hinge jamb at an angle, slide jamb over wall, positioning the door stop between header tabs and the header door stop (Fig. 2)

3. Repeat step 2 for the strike jamb (Fig. 3)




4. Remove nails or screws used to hold the header. Pull down on header so that the jambs rest on finished floor (Fig 4). If the finished floor is not installed, place a shim of same thickness as finished floor, under each jamb. Insert one screw or nail at top of hinge jamb. Install door and close in opening.

5. Using door as a template adjust frame to door so that clearances between door and the frame are equal and between 1/16" - 1/8". If a door is not available square and plumb the frame using a carpenters square and level. Fasten frame to wall starting at the top of the hinge jamb with recommended fasteners (see page 2).

6. To apply wood casings, hold casing against frame and mark the location of each oval nailing slot (Fig. 7). Then place the edge of the casing 1/4" from the inside edge of the frame. Locate 6d finishing nails at locations marked, 1/2" from inner edge of the casing. This will allow nailing through the oval slot.


7. To apply metal casing, please see the snap on casing installation instructions.

# F & KF SERIES FRAMING and FASTENING

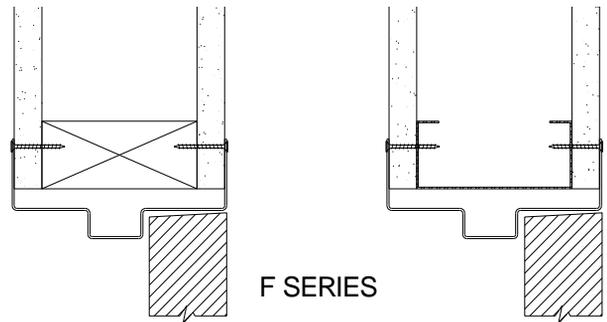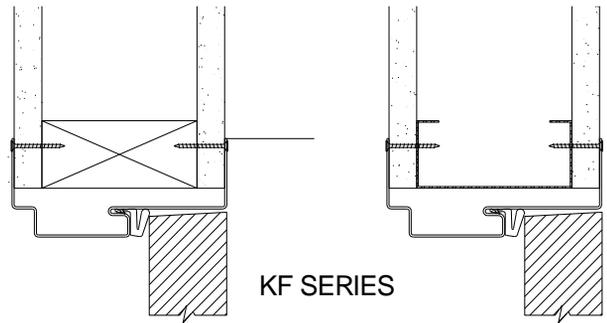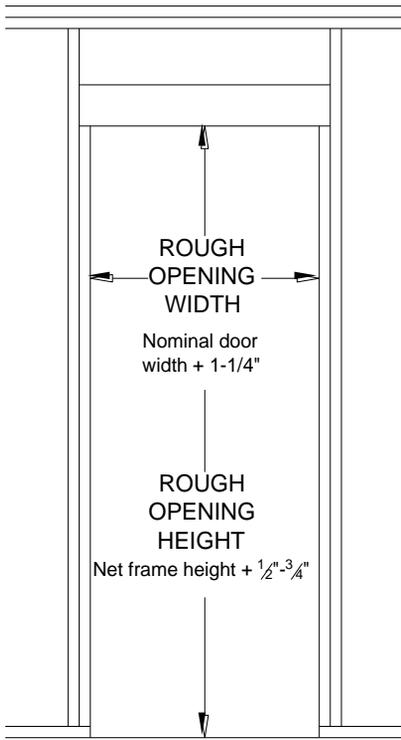

Wall Construction  
Wood Studs & Drywall  
Recommended Fasteners:  
1-1/4" (min.)  
Drywall screws  
Coarse thread  
or  
6d common nails

Wall Construction  
Metal Studs & Drywall  
Recommended Fasteners:  
1-1/4" (min.) Type  
"S" Bugle Head Self-  
Tapping Screws

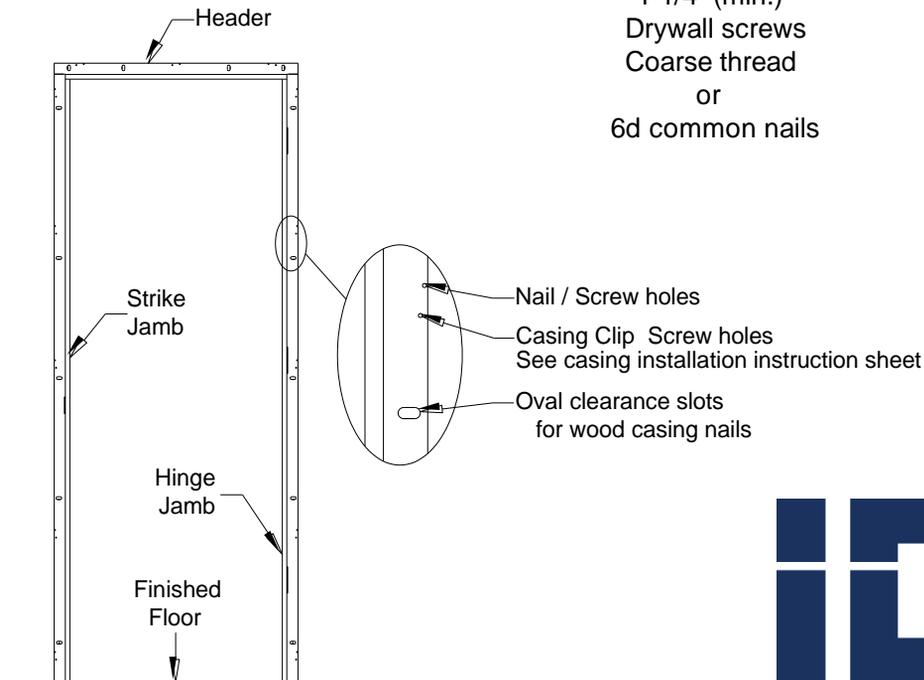

**FIG. 7**



**INTERNATIONAL DOOR PRODUCTS**